


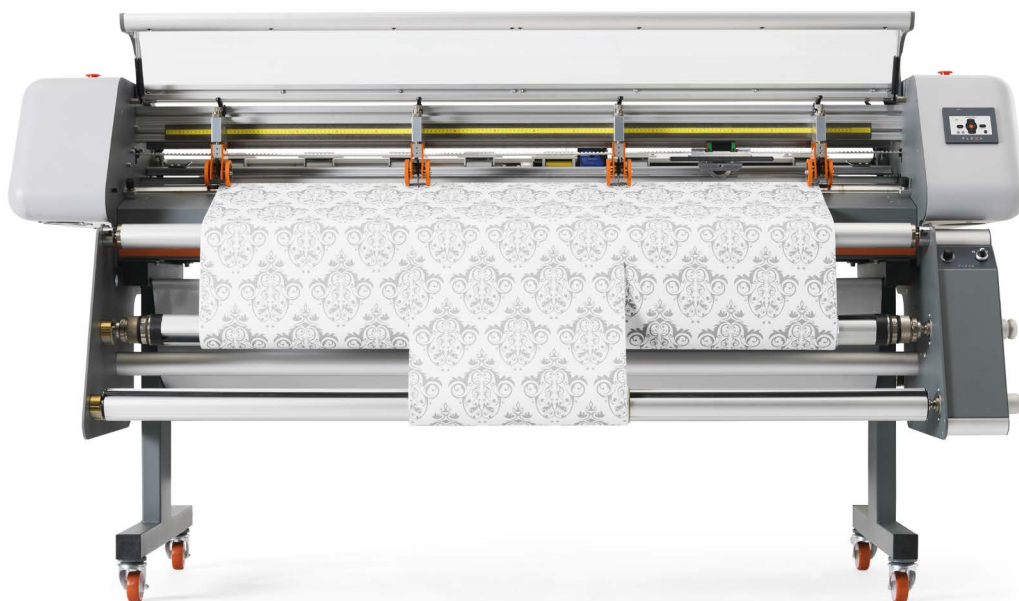

MIURA II WALLPAPER

AUTOMATIC XY CUTTER OF FLEXIBLE MATERIALS

Highly precise cutting machine for X and Y trimming with automatic rewinding system.
Suitable for wallpaper and many other flexible supports.

- > Combined horizontal and vertical cutting for the fastest finish of your rolls
- > Trims and directly rewinds wallpaper's sheets on rolls (up to 3 rolls, also of different sizes). Possibility to work in addition as roll to sheet
- > High cutting accuracy for perfect joints of pattern and designs on the wall
- > 4 operating modes: automatic by crop marks (roll to rolls), automatic by crop marks (roll to sheets), by set length and manual

NEW


Even more intuitive set up parameters thanks to the new designed user-friendly software (LCD touch screen display)

- > Long term reliability and safety combined with low maintenance costs

SUITABLE FOR:

- ☒ Wallpaper
- ☒ Paper (also laminated or encapsulated)
- ☒ Vinyl & self adhesive vinyl
- ☒ Backlit & frontlit display
- ☒ Reflective material
- ☒ PVC banner (up to 900 gr/m² - 27 oz./ya²)
- ☒ Magnetic rubber
- ☒ Polycarbonate (film)
- ☒ Canvas & polyester (with liner)
- ☒ Many more..






Fine positioning of the cutting blades (optional)



Advanced cutting mark reader

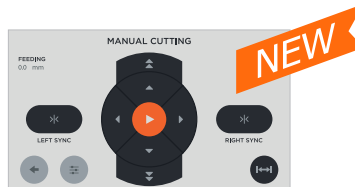

New software design for better usability




Aluminium 3" shaft with flanges for the right alignment of the roll



Fine pressure adjustment (according to the types of material)




Unwinding shaft brake for adjusting the tension of the material

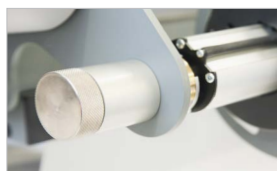

Adjustable unwinding shaft for fine positioning of the material unrolling (optional)



Front rewinding shafts with independent clutches



Single lengthwise rotary crush cutter (twin cutters optional)



Speed regulator and switch to adjust the rotation of the rewinding shafts

Working width	1650 mm (65 in)
Feeding speed	1 - 15 m/min (3 - 49 ft/min) Roll to rolls 1 - 30 m/min (3 - 98 ft./min) Roll to sheets
Usable lengthwise cutting units	max. 8
Cross cutting speed	5 - 120 m/min (16 - 393 ft/min)
Max. roll diameter	Ø 300 mm (12 in)
Max. roll weight	60 kg (132 lb)
Power supply	230 V - 50 Hz - 650 W
Dimensions (W x L x H)	2500 x 1200 x 1350 mm (99 x 47 x 53 in)
Weight	350 kg (772 lb)
Packing Dimensions (W x L x H)	2650 x 1350 x 1600 mm (104 x 53 x 63 in)
Packing Weight	410 kg (904 lb)


Manufactured in compliance
with CE regulations



Follow us:



Distributor



100% Made by FLEXA



100% Made in Italy

